

6100 SP Waterproof Rocker Switches 16A 250Vac - Sealed to IP67[†]



- ▶ IP67[†] Panel seal
- ▶ Supplied complete with gasket
- ▶ Single pole
- ▶ Ratings up to 20A, 277Vac
- ▶ Positive switch action
- ▶ Distinctive styling
- ▶ Illuminated & non-illuminated
- ▶ LED Illumination
- ▶ Matching indicator
- ▶ Bezel size: 30.0 x 11.0



16(4)A 250Vac T125 10A 400Vac T125 for 6101, 6102 & 6111
16(6)A 250Vac T125, 10A 400Vac T125 for 6100, 6108 & 6110



20A 277Vac, 250Vac 11/2hp, 125Vac 1hp*

In house test

20A, 36Vdc




RoHS compliant

3mm contact gap.
Technical data on pages 4 & 5 (switches), 6 (indicators).
ENEC and UL approvals applied for.
* Rating for 'C' terminal only
[†] IP ratings: IP60 (T125), IP66 and IP67 (T55)

C 6108 P L ---

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER
<p>C</p> <p>6.3 x 0.8</p>	<p>Approvals & ratings vary with function ON OFF Switches - ON when pressed over terminal 3</p>	<p>F Flat</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>6100 ON - OFF</p>	<p>P Lit Window</p>
	<p>6101 ON - OFF (momentary ON)</p>	
	<p>6102 ON - OFF (momentary OFF)</p>	
	<p>6108 ON - OFF Lit (Unswitched neutral)</p>	
	<p>6110 ON - ON</p>	
	<p>6111 ON - ON (momentary 1 side)</p>	
	<p>6130 Indicator</p>	
		<p>A Lens Matt (6130 indicator only)</p>

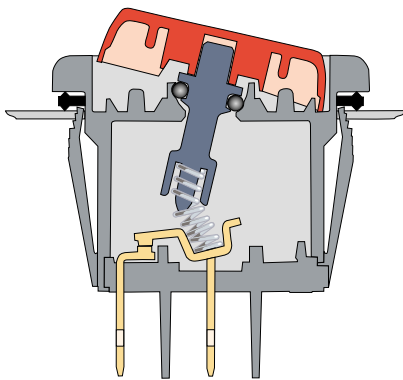



Waterproof Rocker Switch
IP67 Panel Seal.




C6100FL ---



C6108PL ---

BODY	OPTIONS
<p>L</p> <p>Panel cut-out</p>  <p>Bezel</p> 	<p>Finish Matt is standard.</p> <p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing Select from the examples or call sales for custom legends.</p> <p>LED voltage Call sales for details.</p> <p>For all options call sales.</p>

DIMENSIONS (mm)



Panel thickness

L 1.0 to 3.0mm

Note:
Gasket supplied fitted to switch
Cut-outs must be punched in the direction of insertion

Fitting Instructions:
Press switch firmly into panel on both sides of the bezel.
Gasket seals to provide IP67 Sealing.

Examples of printing



EN1224



EN1223