



# Indicator Lights Neon, LED and Filament Lamp

## Colours and voltages:

-  **Neon** Available with Red, Amber, Green or Clear lenses  
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White  
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White  
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses  
6V, 12/14V, 24/28V.







- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm diameter
- ▶ Red, amber, green and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles










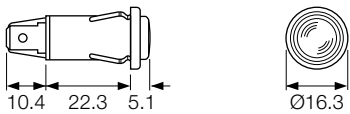












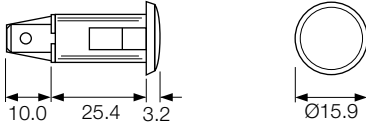







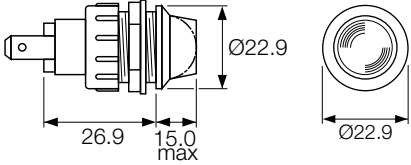
**KEMA**  
**UL file E63363**  
Approvals shown for neon versions only

**RoHS** RoHS compliant

## To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp

| TERM                         | TYPE   | PANEL & °C                 | ILLUMINATION OPTIONS | DIMENSIONS (mm)                               |
|------------------------------|--|----------------------------|----------------------|---|
| L<br>K 2.8<br>H 4.8<br>C 6.3 | (C) <b>2870 00</b><br>                | 12.7<br>0.75-2.0<br>page 6 | DC<br>AC             | 9.9 22.8 5.0<br>Ø13.6                         |
| L<br>K 2.8<br>H 4.8<br>C 6.3 | (C) <b>0589 00</b><br>               | 12.7<br>0.8-1.5<br>page 6  | DC<br>AC             | 10.5 21.6 3.2<br>Ø15.9                        |
| L                            | <b>L 0081 00</b> Chrome bezel<br>   | 12.7<br>9.5<br>page 6      | DC<br>AC             | Ø16.0<br>18.0 11.4<br>Ø18.3                   |
| L<br>K 2.8<br>H 4.8<br>C 6.3 | (C) <b>0177 00</b> Chrome bezel<br> | 12.7<br>12.0max<br>page 6  | DC<br>AC             | 14.9<br>22.2 3.3 8.3<br>53.7<br>32.2<br>Ø14.6 |
| L<br>K 2.8<br>H 4.8<br>C 6.3 | (C) <b>0067 00</b> Chrome bezel<br> | 12.7<br>1.14max<br>page 6  | DC<br>AC             | 38.1 5.1<br>Ø16.0                             |
| L<br>C 6.3                   | (C) <b>0180AA</b><br>               | 12.7<br>19.0max<br>page 6  | DC<br>AC             | 10.4 22.3 5.1<br>21.3 1.3<br>Starlock fixing  |

| TERM  | TYPE  | PANEL & °C   | ILLUMINATION OPTIONS  | DIMENSIONS (mm)   |
|---|---|--|---|---|
| <b>L</b> <br><b>C 6.3</b>   | <b>(C) 0180BB</b> Chrome bezel<br> |  13.5<br> 0.9-1.14<br> page 6     | <br> DC<br>  | <br>10.4 22.3 5.1<br>Ø16.3   |
| <b>L</b> <br><b>K 2.8</b> <br><b>H 4.8</b> <br><b>C 6.3</b>  | <b>(C) 0579 00</b><br>            |  14.0<br> 2.5max<br> page 6   | <br> DC<br> AC<br> | <br>10.0 25.4 3.2<br>Ø15.9  |
| <b>C 6.3</b>   | <b>(C) 1092</b><br>              |  19.0<br> 4.0max<br> page 6 | <br> AC   | <br>26.9 15.0 max<br>Ø22.9 |