

# Low Voltage Lampholders - Sealed to IP67

## Colour and voltage:

These lampholders are suitable for up to 50V max.  
Bulbs will be supplied (dependent on order quantity)  
if a voltage is specified.

Colours - Red, Amber, Green, (Clear & Blue, check availability).

## To create a catalogue number:

Refer to the 2 columns below (terminal and type), then state: Lens colour and voltage.





- ▶ IP67 Panel seal
- ▶ Supplied complete with gaskets/'O' rings
- ▶ Up to 50V
- ▶ Red, Amber, Green, Blue and Clear
- ▶ LES, Midget Flange, MES & MBC bulb

**RoHS**

RoHS compliant

TERM	TYPE	PANEL & °C	ILLUMINATION OPTIONS
C 6.3	<b>C1090 FPS</b> (MES) 	19.0 4.0 max T85	
C 6.3	<b>C1091 FQS</b> (MBC) 	19.0 4.0 max T85	
T	<b>T0062 AOS</b> (Midget flange) Chrome bezel 	12.7 8.5 max T85	
T	<b>T0063 AOS</b> (LES) Chrome bezel 	12.7 8.5 max T85	
T	<b>T0062 MOS</b> (LES & Midget flange) 	12.7 8.5 max T85	
T	<b>T0063 MOS</b> (LES) 	12.7 8.5 max T85	

## DIMENSIONS (mm)

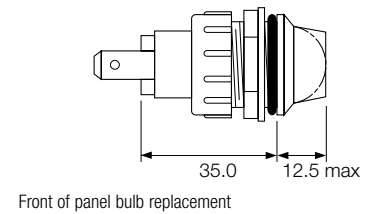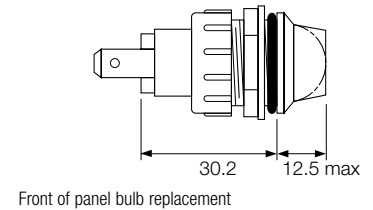

## F0445 MO

P.V.C. Insulating terminal cover.  
For use with C1090 & C1091

