

0305 Combined Switch / Lampholder for Freezers



2A 250Vac 25 T 85 (0305 only)



UL 15W 125/250Vac (0305 only)
UL 65°C, file E116391 (0305 only)



RoHS compliant

Switched units have μ contact gap.
Technical data on pages 4 & 5.

- ▶ E12 and E14 lamps
- ▶ Switch rating up to 2A, 250V ac
- ▶ Auto switching
- ▶ Mercury free
- ▶ Available with right or left hand orientation
- ▶ Available as lampholder only



C0305RT - - -



C0305LT - - -



C 0305 R T - - -

TERMINAL FUNCTION MOUNTING BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ MOUNTING	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>0305 (E14)</p> <p>ON - OFF Switch and Lampholder</p> <p>0306 (E12)</p> <p>ON - OFF Switch and Lampholder</p>	<p>L</p> <p>For Left hinged lid for 0305/0306 switches, not for 0307 lampholder</p> <p>View from bulb end</p>	<p>T</p> <p>Body without flange for 0305/0306 switches</p> <p>Top view</p>	<p>Colour</p> <p>Call sales for colours. A full range is available for large orders.</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>0307 (E14)</p> <p>Lampholder only (No Switch)</p>	<p>R</p> <p>For Right hinged lid for 0307 lampholder or 0305/0306 switches</p> <p>View from bulb end</p>	<p>S</p> <p>Body with rear flange for 0307 lampholder and for 0305/0306 switches</p> <p>Top view</p>	

Dimensions (mm) and Properties

The mechanism of this switch/lampholder does not contain mercury and may be safely used in food storage equipment. When fitted to the lid of a freezer storage cabinet, the switch will operate the lamp when the lid is opened to the angle of tilt shown in the drawing.



0055 Door Switches



C0055RB ---



C0056RB ---

- ▶ Ratings up to 2A, 250V ac
- ▶ High temperature rating up to 125°C
- ▶ Long overtravel
- ▶ Choice of terminal orientation



0055 & 0056
0.2(0.2)A 250Vac 25T125 5E4
(50,000 operations)

RoHS

RoHS compliant

μ contact gap


Technical data on pages 4 & 5



C0055RB ---




C0056RB ---




▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS				
<p>C</p> <p>6.3 x 0.8</p> <p>9.1</p>	<p>0055</p> <p>ON - OFF (momentary OFF) 90° terminals</p>	<p>R</p>	<p>B</p> <p>Panel cut-out</p> <p>Panel thickness</p> <table border="1"> <tr> <td>0055</td> <td>1.0 - 1.6</td> </tr> <tr> <td>0056</td> <td>1.0 - 2.6</td> </tr> </table> <p>Flange</p>	0055	1.0 - 1.6	0056	1.0 - 2.6	<p>Finish</p> <p>Gloss finish only</p> <p>Colour</p> <p>White or black</p> <p>Call sales for custom colours.</p>
0055	1.0 - 1.6							
0056	1.0 - 2.6							
<p>H (0056 only)</p> <p>4.8 x 0.8</p> <p>9.1</p>	<p>0056</p> <p>ON - OFF (momentary OFF) Straight terminals</p>							

Dimensions (mm)
C0055RB



C0056RB



3005 Refrigerator Door Switches Splashproof



3005 25W 25T85 5E4 (50,000 Operations) 250Vac
3006 65W 25T85 5E4 (50,000 Operations) 250Vac



UL 0.3A 250Vac
UL 0.2A 125Vac



RoHS compliant

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.
Technical data on pages 4 & 5.

- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splashproof
- ▶ Choice of terminal orientation
- ▶ Choice of actuators



C3005CB ---




C3005BL ---

C 3005 C B - - -


TERMINAL FUNCTION ACTUATOR BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BEZEL / TERM ORIENTATION	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8 9.1</p>	<p>3005</p> <p>ON - OFF (momentary OFF) 1mm max travel to OFF position</p>	<p>B</p> <p>26.0</p>	<p>R L B</p> <p>Terminal direction (viewed from hinge end)</p> <p>Panel cut-out: 12.1/12.2, 25.4, 25.5</p> <p>Bezel: 14.0, 30.2</p> <p>Bezel Profile: 5.0</p>	<p>Finish Gloss finish only</p> <p>Colour White is standard</p> <p>Call sales for custom colours. A full range is available for large orders.</p>
<p>H</p> <p>4.8 x 0.8 9.1</p>	<p>3006</p> <p>ON - OFF (momentary ON) 3mm min travel to ON position</p>	<p>C</p> <p>13.0</p>		

Dimensions (mm) (C terminals shown)

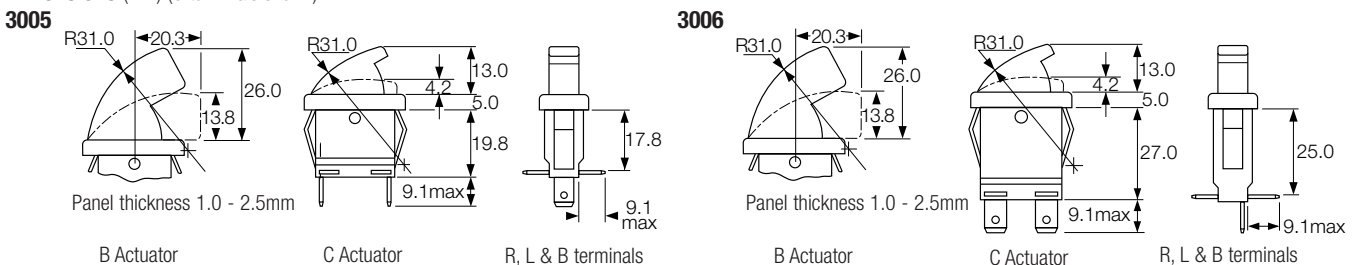

3100 Refrigerator Door Switches Splashproof

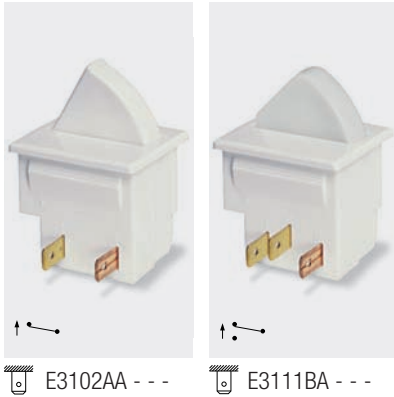

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splashproof
- ▶ Changeover, momentary ON and momentary OFF
- ▶ Choice of actuators



5A 250Vac 25T85 5E4 (50,000 Operations)

UL CSA 5A 250Vac
UL 85°C, file E45221, CSA file LR10990

In house test

200W 250Vac Lampload (1,000,000 operations)

RoHS

RoHS compliant

μ contact gap.
Technical data on pages 4 & 5.
Sealed terminals option available. Call sales for details.

E 3102 A A - - -


TERMINAL FUNCTION ACTUATOR BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>E</p> <p>4.8 x 0.5</p> <p>For sealed terminals call sales</p>	<p>3101</p> <p>ON - OFF (momentary ON)</p> <p>3102</p> <p>ON - OFF (momentary OFF)</p> <p>3111</p> <p>ON - ON (momentary 1 side)</p>	<p>A</p> <p>B</p> <p>C</p> <p>D</p>	<p>A</p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p>Finish Gloss finish only</p> <p>Colour White is standard</p> <p>Call sales for custom colours. A full range is available for large orders.</p>

Dimensions (mm) ("A" actuator shown)

- 3101** uses terminals 1,2
- 3102** uses terminals 1,2
- 3111** uses terminals 1,2,3

For details of actuator travel and switching angles call sales.

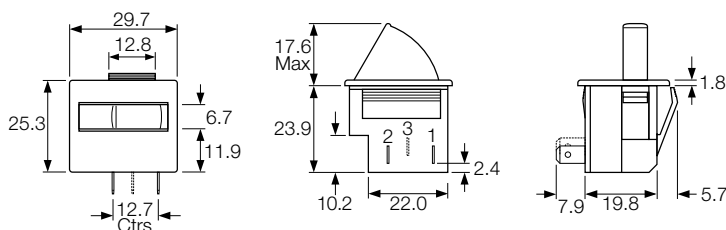

3140 Refrigerator Door Switches Splashproof



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac
UL 85°C, file E45221, CSA file LR10990

In house test


24Vac & 110Vac Lamplload (500,000 operations)



RoHS compliant

3141, μ contact gap.
3145 and 3146, 3mm contact gap.
Technical data on pages 4 & 5.
Sealed terminals option available. Call sales for details.

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splashproof
- ▶ Momentary action
- ▶ Choice of actuators
- ▶ 2 circuit switch

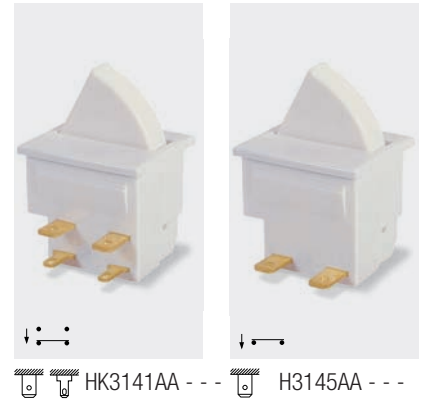

HK3141AA --- H3145AA ---

HK 3141 A A ---

TERMINALS FUNCTION ACTUATOR BODY COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>H</p> <p>4.8 x 0.8</p> <p>Standard format is H terminals in positions 1 & 2 and K terminals in positions 3 & 4</p> <p>For sealed terminals call sales</p>	<p>3141</p> <p>ON - ON (momentary)</p> <p>3145</p> <p>ON - OFF (momentary OFF)</p> <p>3146</p> <p>ON - OFF (momentary ON)</p>	<p>A</p> <p>B</p> <p>C</p> <p>D</p>	<p>A</p> <p>Optional cut-out for orientation</p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p>Finish Gloss finish only</p> <p>Colour White is standard</p> <p>Call sales for custom colours. A full range is available for large orders.</p> <p>Reversed Actuators Also available with actuators reversed.</p> <p>Order as: 3151 (3141 type) 3155 (3145 type) 3156 (3146 type)</p>

Dimensions (mm) ("A" actuator shown)

3141 uses terminals 1,2,3,4

3145 uses terminals 3,4

3146 uses terminals 1,2

For details of actuator travel and switching angles call sales.

