

9100 Pull Cord Switches 16(4)A 250Vac

Approvals and specifications



16(4)A 250Vac T125
16A 400Vac T125
8(8)A 250Vac T125 5E4 (50,000 Operations)



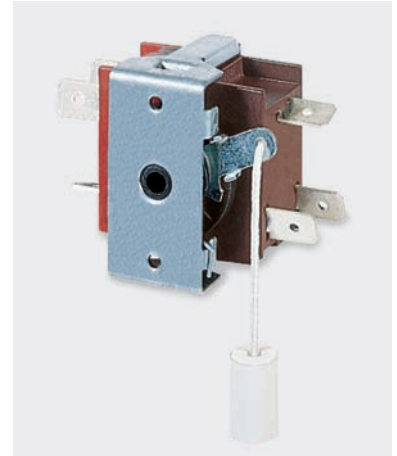
UL CSA 20A 277Vac, 250Vac 2hp, 125Vac 1hp
UL85°C, file no. E45221, CSA file no. LR10990

In house test: 30A 12V dc — Indicative rating only


9100 pull cord switches have 45° indexing







3mm contact gap
Technical data on pages 4 & 5

- ▶ Pull cord operation
- ▶ Ratings up to 16A, 250V ac; 20A, 28V dc
- ▶ 2 & 4 way rotary switch
- ▶ Pairs of single pole change over contacts
- ▶ Wide choice of switching circuits



C9821PC ---



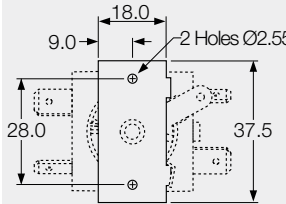▶ TERMINAL	▶ SERIES	▶ POSITIONS/CIRCUIT	▶ BODY/MOUNTING
<p>C</p>  <p>9.2</p> <p>6.3 x 0.8</p>	98	<p>21 Off</p> <p>1</p> 	<p>PC</p> <p>2 hole fixing</p>  <p>18.0 9.0 2 Holes Ø2.55 28.0 37.5</p>
<p>H</p>  <p>9.2</p> <p>4.8 x 0.8</p> <p>For approval information on H terminals, contact sales</p>		<p>22 Off</p> <p>1+3</p> 	
		<p>41 Off</p> <p>1+3 2+4 1+2+3+4</p>  <p>For other circuits please contact sales</p>	

Dimensions (mm)

9100PC (C terminals shown)

