

IEC Connectors & NEMA Receptacles

Approvals and specifications




10A 250V ac



UL CSA 10A 250V ac UL 65°C

To order:
State Type number and terminal codes. All items supplied for 1.0mm panel thickness as standard. Contact factory for additional options.





- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ NEMA outlets
- ▶ Fused and non fused
- ▶ Flange and snap fit panel mounting

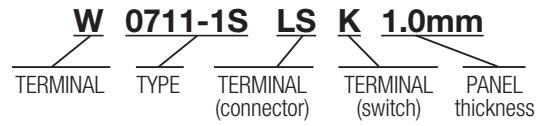


TYPE	TERMINAL
0707-1-C Inlet	S 2.5 Solder
	N 4.0 Solder
	Q 4.8 Tab
	W 6.3 Tab
0708-1-C Outlet	N 4.0 Solder
	Q 4.8 Tab
	W 6.3 Tab
	P PCB
0709-P Outlet	L 4.0 Solder
	Q 4.8 Tab
0710-P Outlet	V12 Solid Wire
	V16 Solid Wire
0711-P Inlet	S 2.5 Solder
	N 4.0 Solder
	Q 4.8 Tab
	W 6.3 Tab

DIMENSIONS (mm)

View below is at Y

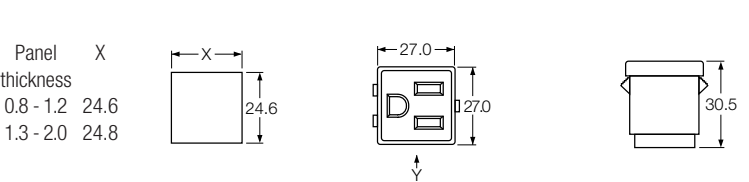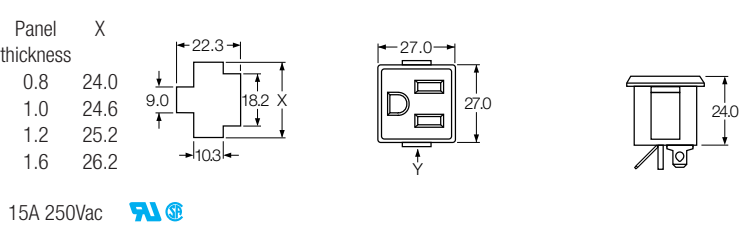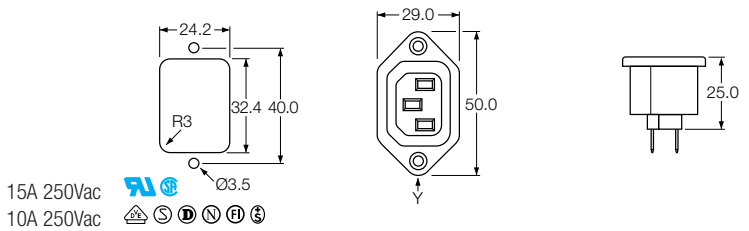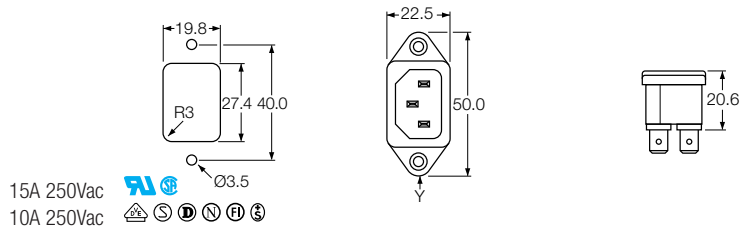


0710-PV16 is 13A 250Vac. **0710-PV12** is 15A 250Vac

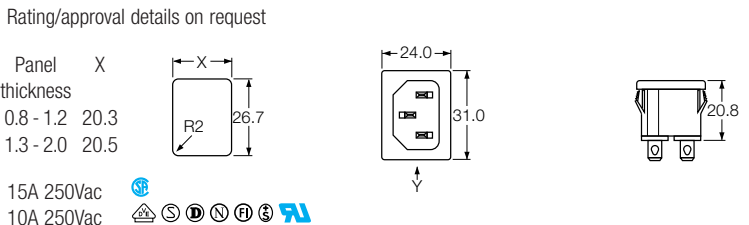

IEC sockets

IEC Connectors & NEMA Receptacles

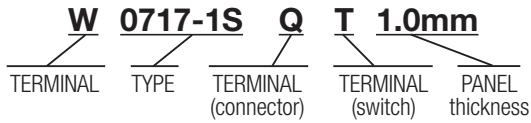

- ▶ Ratings up to 10A, 250V ac
- ▶ IEC 320 Inlets & outlets
- ▶ Fused and non fused
- ▶ Flange and snap in panel mounting

Approvals and specifications


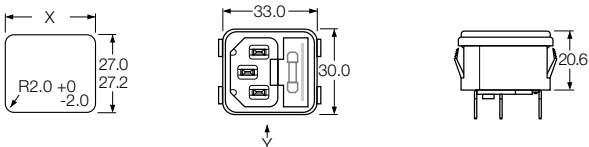


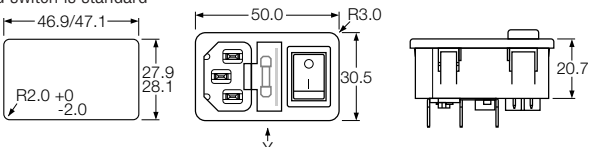








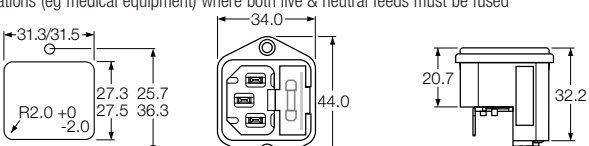


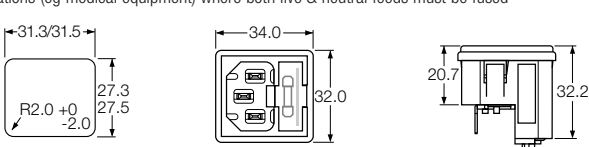









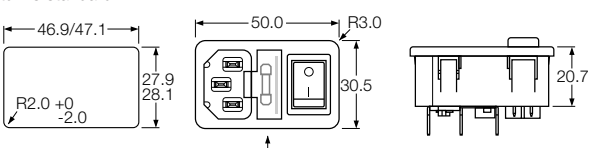

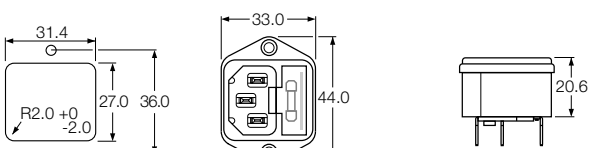10A 250V ac

UL CSA 10A 250V ac UL 65°C

To order:


State Type number and terminal codes. All items supplied for 1.0mm panel thickness as standard. Contact factory for additional options.

TYPE	TERMINAL	DIMENSIONS (mm)	View below is at Y
0717-1-P  Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab	Panel thickness X 0.8 - 1.2 31.4 1.3 - 2.0 31.6	
		10A 250Vac	
0717-1S State "Non Lit"  Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch	Panel thickness: 1.0mm standard Call sales for options	
		10A 250Vac	
0717-1S State "Lit"  Switched Fused Inlet 5x20	Q 4.8 Solder Connector T 4.8 Solder Switch	Panel thickness: 0.8 or 1.0 or 1.2 Call sales for details	
		10A 250Vac	
0717-C  Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab		
		10A 250Vac	
0717-2-C (2k min order)  Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab		
		10A 250Vac	
0717-2-P (2k min order)  Double Fused Inlet 5x20	S 2.5 Solder LS 2.8 Solder Q 4.8 Tab W 6.3 Tab	Panel thickness: 1.0mm standard Call sales for options	
		10A 250Vac	

TYPE	TERMINAL
0721-P (2k min order)  Inlet	S Solder 
0722-C (2k min order)  Inlet	Q 4.8 Solder  W 6.3 Tab 
0723-C (2k min order)  Outlet	Q 4.8 Solder  W 6.3 Tab 

DIMENSIONS (mm)

View below is at Y

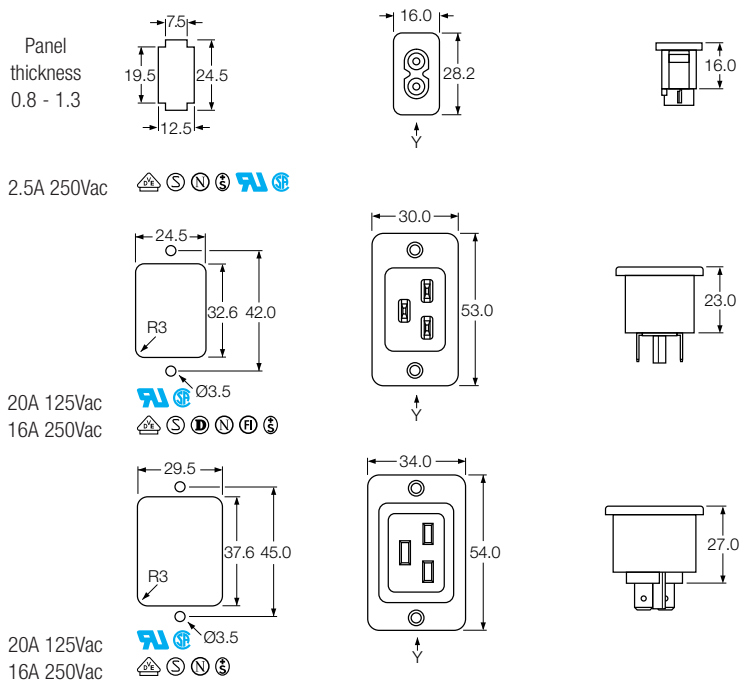













Technical data

Mouldings V2 (VO option)
 Connectors Tin plated solid brass
 Terminals Silver plated

Terminal dimensions

For Connectors

For Switches

For Connectors									For Switches		
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											
1.5x2.5 4.5	2.0x3.2 5.5	2.8x3.3 6.5	Ø1.7 8.0	1.7x3.0 5.5	Ø3.0x6.0	1.5x3.0 10.0	1.35	0.8	2.8 5.0 1.6	7.0 1.3	R1.0 R0.5 3.5 8.5

Note: Designated solder terminals should not be fitted with "Push on", "QD" or "Fast on" type cable connectors