

# Fuseholders 5 x 20 mm



- ▶ 5 x 20mm fuses
- ▶ Finger grip or screwdriver slot knob options.
- ▶ Hand release and screwdriver release
- ▶ PC2 protection category
- ▶ Solder & 2.8mm terminals
- ▶ Raised or low profile bezels
- ▶ Snap in or threaded bushing mounting options
- ▶ Snap fit or screw to panel fixing

**T 0332 RA ---**  
 TERMINAL BODY & CAP PANEL HOLE OPTIONS



**6.3A 250Vac (max fuse rating\*) T-55 to T+70 (ambient)**  
**Maximum dissipation wattage: 1.5W**



**6.3A UL 94V2 UL file E92075 CSA file LR44770**



**RoHS compliant**

These products comply with safety category PC2.  
 \*Users should be aware of the de-rating factors published by specialist manufacturers of fuses.

These fuseholders are fitted with combination (solder/2.8) mid-body terminals. It has not been possible to show both views here.



**M520**  
Terminal Cover




**A0033 00**  
In-line 5 x 20 fuseholder  
Extra low voltage 5A Max


▶ TERMINAL	▶ BODY AND CAP	▶ PANEL HOLE
<p><b>T</b></p> <p>Solder</p>	<p><b>0332</b> Finger grip</p> <p></p>	<p><b>RA</b></p>
	<p><b>0333</b> Screwdriver release</p> <p></p>	
	<p><b>0340</b> Screwdriver release</p> <p></p>	<p><b>RD</b></p>
<p><b>B</b></p> <p>2.8 x 0.5</p>	<p><b>0341</b> Screwdriver release</p> <p></p>	

## DIMENSIONS (mm)


**0332** (T terminal shown)



**0333** (T terminal shown)



**0340** (T terminal shown)

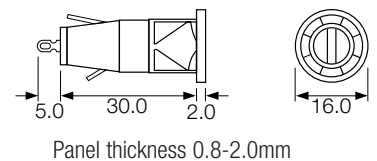

**0341** (T terminal shown)

